


timing:
 during one circle
 allways two outlets blows about
 1.5 sec long (--> on)
 every 60 sec.

CAUTION:
 do not use more than 60psi (4,14 bar)
 sequencer damage may occur

2x Befestigungsschraube
 2x mounting screw
 UNF 10-32x 3/8"
 (-->Ø4.8x 9.5mm)

included

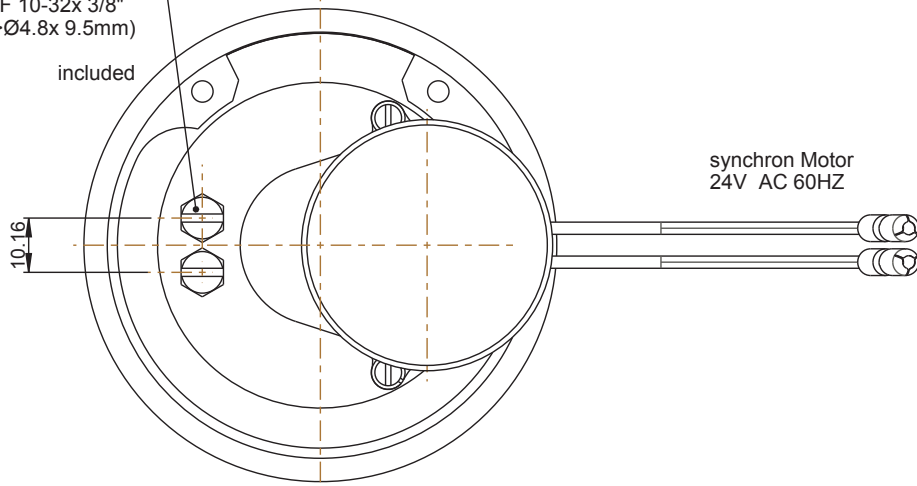

Luft-Sequencer, 18 Ausgänge, zweifacher Luftauslass
 Air Sequencer, 18 outlets, double cam

611-240-019-1000