


NEW

PROCONNECT®



NF160 new model

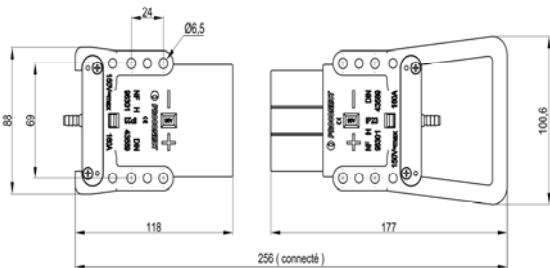

Socket with built-in handle



Electrical and air auxiliary contacts



Quick assembly thanks to the holding clip



Full compatibility with other existing models



Availability in 50mm² and 35mm²



Shock and acid resistance



10 000 insertions



Built to standards : FEM 96301 / DIN 43589

Nominal amperage : 160A
Nominal voltage : 150 VDC
Voltage key coding finger
Temperature range : - 40°C / + 100°C
Protection : IP23
Crimp copper alloy contacts

Female socket with handle | **Male plug**

35 mm ²	169166-N	169162-N
50 mm ²	169165-N	169161-N

ACCESSORIES

Electrical auxiliary contacts

169355-N Set of 2 male aux. contacts cal. 4
169356-N Set of 2 female aux. contacts cal. 4
169361-N Set of 2 male aux. contacts cal. 2.4
169362-N Set of 2 female aux. contacts cal. 2.4

Handles (for male plug)

169339 : Black handle
169339-R Red handle
169339-RH : Reinforced red handle

Air auxiliary contact

169363-N Air contact cal. 4