




XLC Lined Ball Valve ASME Dimensions

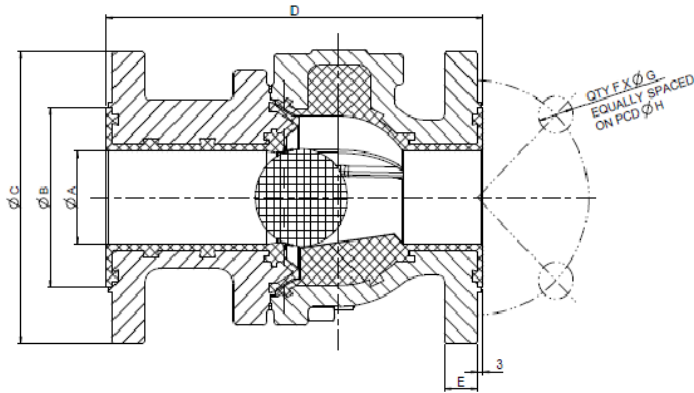

XOMOX XLC 13B-Long Pattern

Crane ChemPharma & Energy
Fully Lined
Flange Connections ASME B16.5-Class 150
Face-to-face Dimensions Long Pattern

Formerly (B202)

SIZE	A		B		C		D		E		F	G		H		Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm	lb	kg
½"	0.59	15	1.38	35	3.50	89	5.12	130	0.38	9.6	4	½ -13 UNC-2B		2.38	60.3	7.6	3.4
¾"	0.79	20	1.69	43	3.88	98	5.91	150	0.44	11.2	4	½ -13 UNC-2B		2.75	69.9	8.7	3.9
1"	0.91	23	2.00	51	4.25	108	6.00	152.3	0.50	12.7	4	0.63	16	3.12	79.4	9.2	4.2
1 ½"	1.46	37	2.88	73	5.00	127	7.01	178	0.63	15.9	4	0.63	16	3.88	98.4	17.7	8.0
2"	1.85	47	3.62	92	6.00	152	7.99	203	0.69	17.5	4	0.75	19	4.75	121	23.6	10.7
3"	2.95	75	5.00	127	7.50	191	9.49	241	0.88	22.3	4	0.75	19	6.00	152	48.4	22.0
4"	3.82	97	6.19	157	9.00	229	11.50	292	0.88	22.3	8	0.75	19	7.50	191	76.2	34.6
6"	5.71	145	8.50	216	11.0	279	14.02	356	0.88	22.3	8	0.91	23	9.50	241	127	57.6

Flow Coefficient						
Size	1"	1 ½"	2"	3"	4"	6"
Cv	20	67	73	200	251	464
Kv [m3/h]	17	58	64	170	216	400